- LED projector with adjustable beam position
- Aluminium body machined from solid in 6082 alloy with surface protection treatment and subsequent polyester powder painting resistant to corrosion, atmospheric conditions and salt spray
- Stainless steel fork designed for clable protection with polyester powder painting
- Thermal shock resistant tempered, extraclear, anti-glare safety glass with grinded edges
- Plastic cable gland resistant to corrosion, atmospheric conditions and salt spray
- Silicone gaskets
- Stainless steel external screws
- Power supply integrated in the product body
- Spike accessory available on request
- Safety cable accessory available on request
- Maximum permissible ambient temperature + 50°C

- *Proiettore LED con fascio di luce orientabile*
- *Corpo in alluminio tornito dal pieno lega 6082 con trattamento superficiale di protezione e successiva verniciatura in polvere di poliestere resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Forcella di fissaggio in acciaio inox con sistema di protezione del cavo verniciata a polvere*
- *Vetro di sicurezza temperato con bordi molati, extrachiaro ed antiriflesso resistente agli shock termici*
- *Pressacavo in plastica resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Guarnizioni in silicone*
- *Viti esterne in acciaio inox*
- *Alimentatore integrato nel corpo del prodotto*
- *Picchetto accessorio disponibile su richiesta*
- *Cavo di sicurezza accessorio disponibile su richiesta*
- *Temperatura ambiente massima ammissibile +50°C*

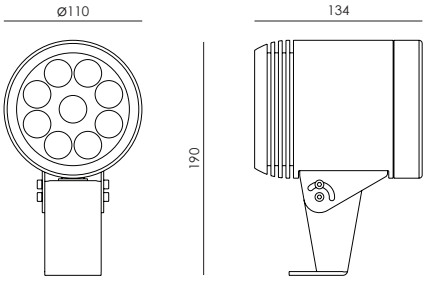

IP65 Kg 1.90 A↑G F

Lamp / *Lampada*	Input / *Alimentazione*	Power / *Potenza*	Color Tolerance/ *Tolleranza Cromatica*	CRI / *CRI*
PCB 9 LED CREE	220/240V 50/60Hz	12W	2-SDCM / 3-SDCM	80 MIN

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

OVO 9

NEXO LUCE











*SPIKE ACCESSORY ON REQUEST
ACCESSORIO PICCHETTO SU RICHIESTA
code: 003.0203.C (Dark Grey/Antracite)

*SAFETY CABLE L.600MM D2,0MM ACCESSORY ON REQUEST
ACCESSORIO CAVO DI SICUREZZA L.600MM D2,0MM SU RICHIESTA
code: 003.0222.G (Stainless Steel/Acciao INOX)

Finishing

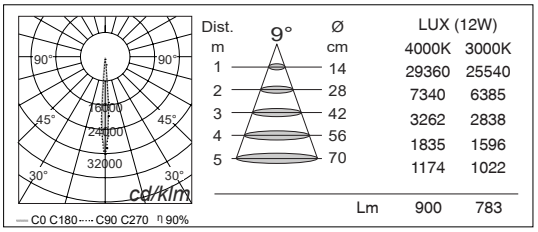

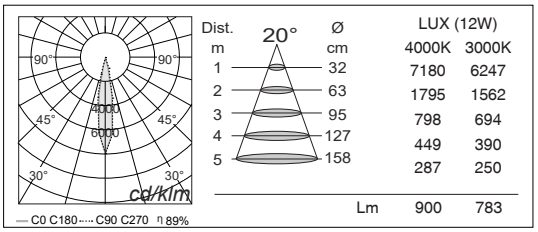

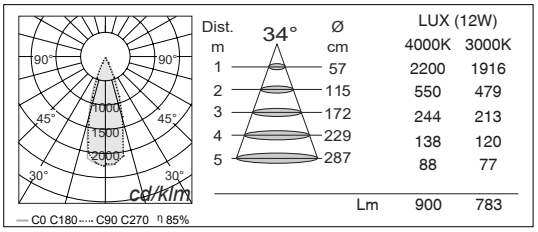

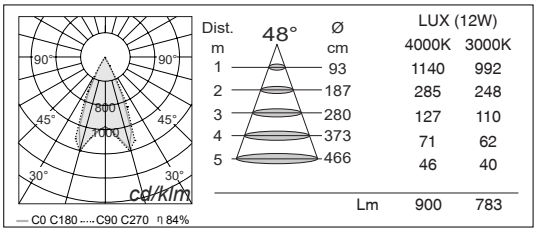

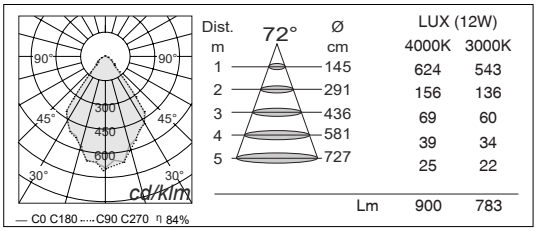

MAIN CODE *CODICE BASE*	RELEASE *EDIZIONE*	LIGHT COLOR *COLORE LUCE*	WATT *WATT*	OPTIC *OTTICA*	CONTROLLO *CONTROL*	FRAME COLOR *COLORE*
1017	**.2**	**B** 3000K	**.12** 12W	**.B** 9°	**1** ON/OFF	**.C** DARK GREY / *ANTRACITE*
		C 4000K		**.D** 20°		
		* others on request / *altri su richiesta*		**.G** 34°		
				.I 48°		
				.K 72°		

CODE EXAMPLE : Projector with warm white light color at 3000K, 12W, 9° optic, ON/OFF control, frame dark grey color
1017.2B.12.B1.C

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 12W, ottica 9°, controllo ON/OFF, colore grigio antracite
1017.2B.12.B1.C

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.