



- Drive-over linear LED Uplight
- Stainless steel body
- Transparent glass diffuser
- Plastic cable glands resistant to corrosion, atmospheric conditions and salt spray
- IP67 power supply integrated inside product body
- In/out IP68 plugs for cascade connection included
- Stainless steel housing for installation included
- Stainless steel external screws
- Max number of connectable projectors: 30
- Maximum permissible ambient temperature +50°C

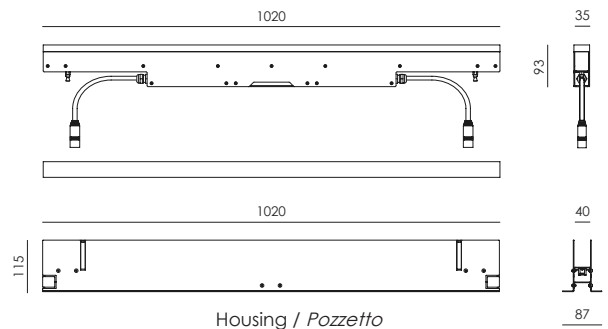

- *Proiettore LED lineare a pozzetto carrabile*
- *Corpo in acciaio inox*
- *Diffusore in vetro trasparente*
- *Pressacavi in plastica resistenti agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Alimentatore IP67 integrato nel corpo del prodotto*
- *Connettori IP68 per collegamento in cascata inclusi*
- *Controcassa per installazione in acciaio inox inclusa*
- *Viti esterne in acciaio inox*
- *Numero massimo di proiettori collegabili: 30*
- *Temperatura ambiente massima ammissibile +50°C*

SUITABLE FOR CONTINUOUS LINES INSTALLATION  
ADATTO PER INSTALLAZIONI A LINEE CONTINUE




Lamp / Lampada	Input / Alimentazione	Power / Potenza	Color Tolerance/ Tolleranza Cromatica	CRI / CRI
LED STRIP	220/240V 50/60Hz	36 W	2-SDCM / 3-SDCM	80 MIN



NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

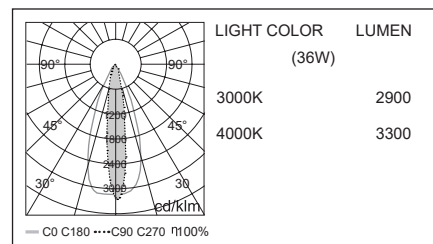

MAIN CODE CODICE BASE	RELEASE EDIZIONE	LIGHT COLOR COLORE LUCE	WATT WATT	OPTIC OTTICA	CONTROL CONTROLLO	FRAME COLOR COLORE
<b>1111</b>	<b>.1</b>	<b>B</b> 3000K	<b>.36</b> 36W	<b>DY</b> ELLIPTIC 15°x45°	<b>1</b> ON/OFF	<b>.U</b> GLASS / VETRO
		<b>C</b> 4000K		<b>BN</b> 10°		

CODE EXAMPLE : Projector with warm white light color at 3000K, 36W, elliptic 15°x45° optic, ON/OFF control, full glass  
1111.1B.36DY1.U

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 36W, ottica ellittica 15°x45°, controllo ON/OFF, tutto vetro  
1111.1B.36DY1.U

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy