- Circular recessed LED downlight
- Aluminium body and cable gland machined from solid in 6082 alloy with black surface protection treatment
- Brushed and laser marked stainless steel frame AISI 316L
- Available with STAR optic, made in crystal
- Thermal shock resistant tempered, extraclear, anti-glare safety glass with grinded edges
- Circuit board in alluminium sp1.5mm with Led Cree
- Harmonic steel springs for ceiling installation.
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- Maximum permissible ambient temperature + 50°C



- *Proiettore LED da incasso circolare*
- *Corpo e pressacavo realizzati in alluminio tornito dal pieno lega 6082 anodizzati neri*
- *Cornice esterna in acciaio inox AISI 316L spazzolata e marcata a laser*
- *Disponibile con ottica STAR realizzata in cristallo*
- *Vetro di sicurezza temperato con bordi molati, extrachiaro ed antiriflesso resistente agli shock termici*
- *Circuito stampato in alluminio sp1.5mm con Led Cree*
- *Molle per installazione a soffitto in acciaio armonico.*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Temperatura ambiente massima ammissibile +50°C*



Star optic / *ottica star*





Power Supply / *alimentatore*

IP67

Lamp / *Lampada*	Input / *Alimentazione*	Power / *Potenza*	Color Tolerance/ *Tolleranza Cromatica*	CRI / *CRI*
PCB 1 LED CREE	220/240V 50/60Hz	1,5 / 3W	2-SDCM / 3-SDCM	80 MIN

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

OMNIA 1 IN



STAR
EFFECT

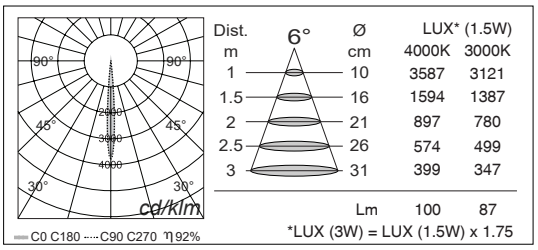

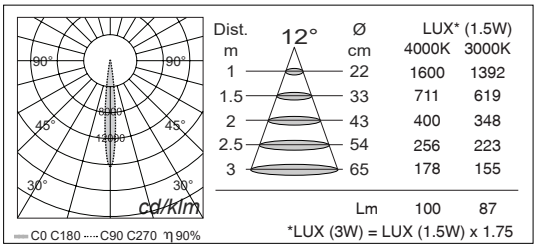

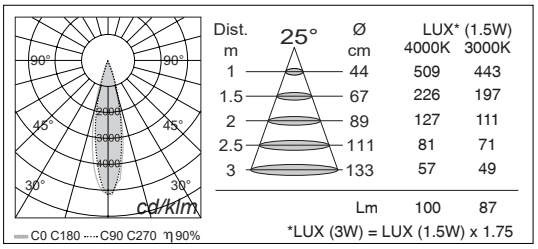

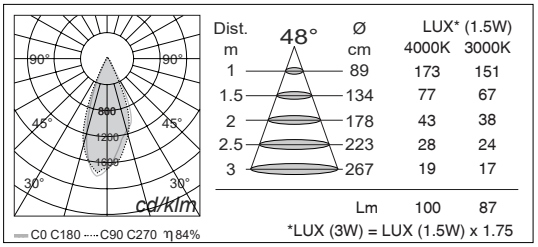

Finishing

MAIN CODE *CODICE BASE*	RELEASE *EDIZIONE*	LIGHT COLOR *COLORE LUCE*	WATT *WATT*	OPTIC *OTTICA*	CONTROLLO *CONTROL*	FRAME COLOR *COLORE*
2107	**.2**	**B** 3000K	**.01** 1.5W	**.A** 6°	**1** ON/OFF	**.G** STAIN. STEEL / *INOX*
		C 4000K	**.03** 3W	**.C** 12°		
		* others on request / *altri su richiesta*		**.E** 25°		
				.I 48°		
				AO STAR		

CODE EXAMPLE : Projector with warm white light color at 3000K, 3W, 12° optic, ON/OFF control, frame stainless steel color
2107.2B.03.C1.G

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 3W, ottica 12°, controllo ON/OFF, colore in acciaio inox
2107.2B.03.C1.G

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.