- Beam effect adjustable LED projector
- Aluminium body machined from solid in 6082 alloy with surface protection treatment and subsequent polyester powder paint resistant to corrosion, atmospheric conditions and salt spray
- Plexiglass diffuser
- Anodized aluminium cable gland resistant to corrosion, atmospheric conditions and salt spray
- Silicone gaskets
- Stainless steel external screws
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- IP68 male ad female connectors and neoprene cable for connection extension (between projector and power supply) accessories available on request
- Spike accessory available on request
- Safety cable accessory available on request
- Maximum permissible ambient temperature + 50°C

- *Proiettore LED orientabile per effetto a fasci di luce*
- *Corpo in alluminio tornito dal pieno lega 6082 con trattamento superficiale di protezione e successiva verniciatura in polvere di poliestere resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Diffusore in plexiglass*
- *Pressacavo in alluminio anodizzato resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Guarnizioni in silicone*
- *Viti esterne in acciaio inox*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Connettori IP68 maschio e femmina e cavo in neoprene per prolunga connessione (fra proiettore ed alimentatore) accessori disponibili su richiesta*
- *Picchetto accessorio disponibile su richiesta*
- *Cavo di sicurezza accessorio disponibile su richiesta*
- *Temperatura ambiente massima ammissibile +50°C*

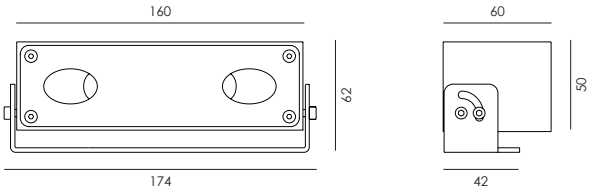

IP65 Kg 0.90 A↑G F

Lamp / *Lampada*	Input / *Alimentazione*	Power / *Potenza*	Color Tolerance/ *Tolleranza Cromatica*	CRI / *CRI*
2 PCB 1 LED CREE	220/240V 50/60Hz	4 / 8 W	2-SDCM / 3-SDCM	80 MIN

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

VIA 2



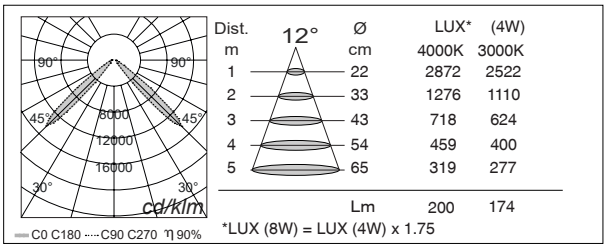



*SPIKE ACCESSORY ON REQUEST
ACCESSORIO PICCHETTO SU RICHIESTA
code: 003.0203.C (Dark Grey/Antracite)

*SAFETY CABLE L.600MM D2,0MM ACCESSORY ON REQUEST
ACCESSORIO CAVO DI SICUREZZA L.600MM D2,0MM SU RICHIESTA
code: 003.0222.G (Stainless Steel/Acciao INOX)

Finishing

DARK GREY/ANTRAC.

*IP68 CONNECTORS ON REQUEST
CONNETTORI IP68 SU RICHIESTA
code: 003.0223.0

*2x0,35 H05RN-F CABLE (1 meter) ON REQUEST
CAVO 2X0,35 H05RN-F (1 metro) SU RICHIESTA
code: 003.0224.0

MAIN CODE *CODICE BASE*	RELEASE *EDIZIONE*	LIGHT COLOR *COLORE LUCE*	WATT *WATT*	OPTIC *OTTICA*	CONTROL *CONTROLLO*	FRAME COLOR *COLORE*
2246	**.1**	**B** 3000K	**.04** 4W	**.C** 12° (2x12°)	**1** ON/OFF	**.C** DARK GREY / *ANTRACITE*
		C 4000K	**.08** 8W			
		* others on request / *altri su richiesta*				

CODE EXAMPLE : Projector with warm white light color at 3000K, 4W, 12° optic, ON/OFF control, dark grey
2246.1B.04.C1.C

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 4W, ottica 12°, controllo ON/OFF, antracite
2246.1B.04.C1.C

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.