


- Circular recessed LED downlight
- Anodized aluminium body machined from solid in 6082 alloy and aluminum ring with polyester powder paint resistant to corrosion
- Beam angles 20° 30° 48° 86°
- Available with transparent or frost diffuser glass
- Springs for ceiling installation
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- Maximum permissible ambient temperature +50°C for the 5W, 10W and 14W versions, +35°C for the 19W and 25W versions




- *Proiettore LED da incasso circolare*
- *Corpo in alluminio anodizzato tornito dal pieno lega 6082 ed anello in alluminio con verniciatura in polvere di poliestere resistente alla corrosione*
- *Angoli del fascio 20° 30° 48° 86°*
- *Disponibile con vetro diffusore trasparente oppure frost*
- *Molle per installazione a soffitto*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Temperatura ambiente massima ammissibile +50°C per le versioni da 5W, 10W e 14W, +35°C per le versioni da 19W e 25W*

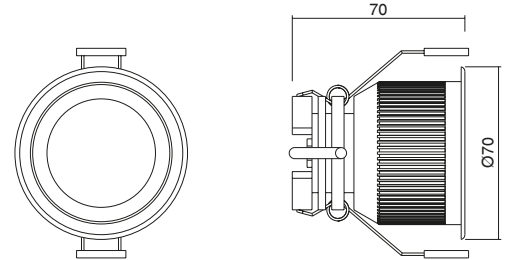

IP65







Lamp / Lampada 1 LED COB CREE	Input / Alimentazione 220/240V 50/60Hz	Power / Potenza 5/10/14/19/25W	Color Tolerance/ Tolleranza Cromatica 2-SDCM / 3-SDCM
-------------------------------------	--	--------------------------------------	---

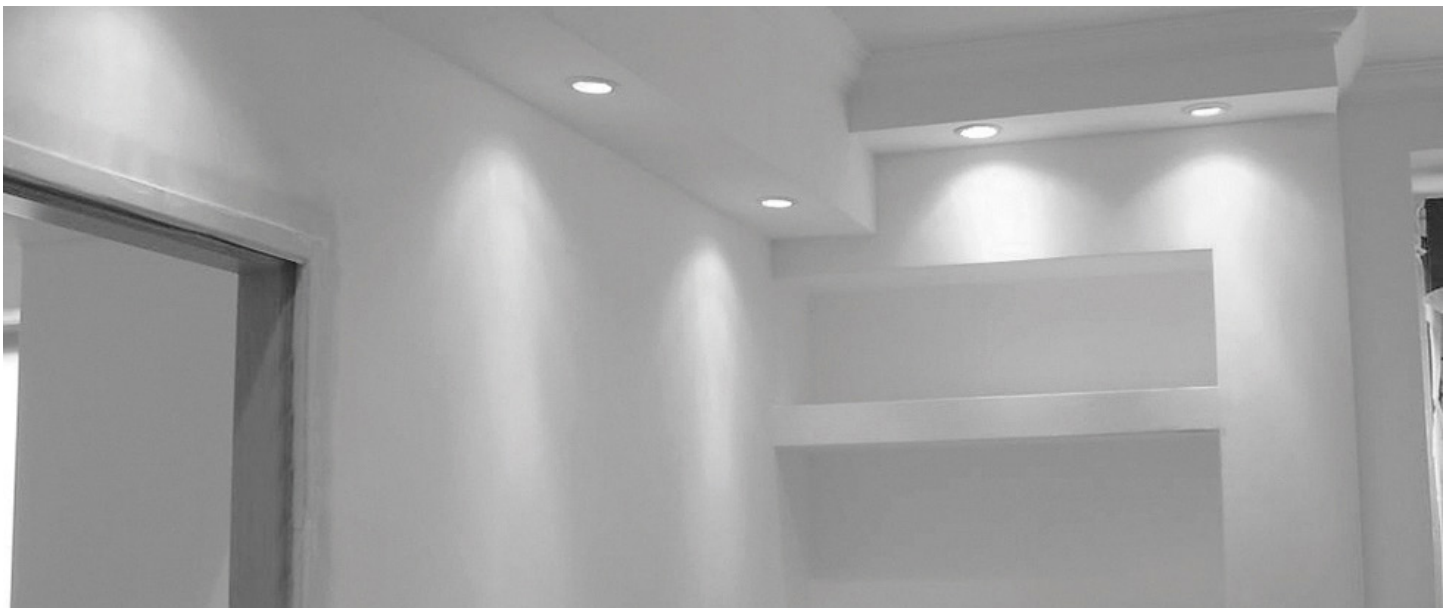

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

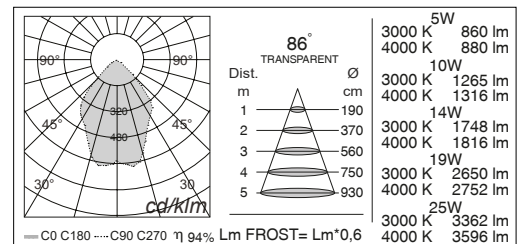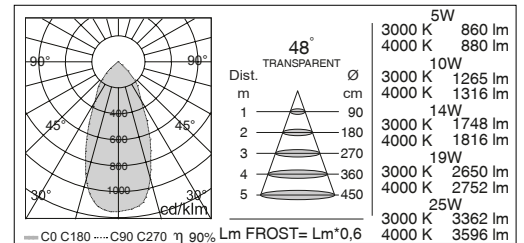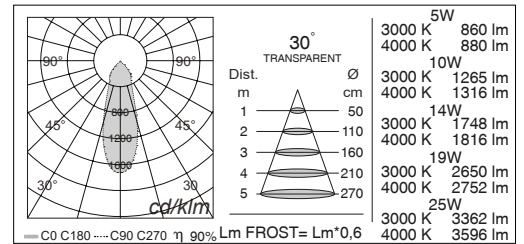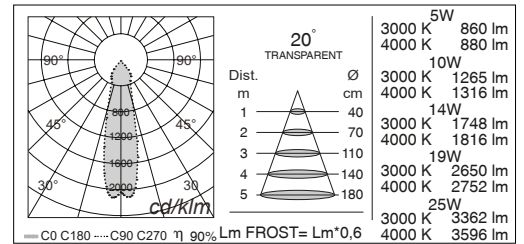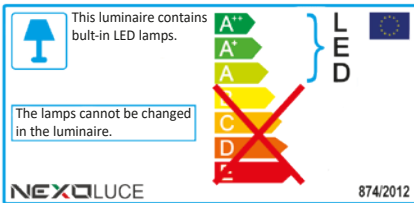

MAIN CODE CODICE BASE	RELEASE EDIZIONE	LIGHT COLOR COLORE LUCE	WATT WATT	OPTIC OTTICA	CONTROL CONTROLLO	FRAME COLOR COLORE
<b>2596</b>	<b>.1</b>	<b>B</b> 3000K	<b>.05</b> 5W	<b>.D</b> 20° (TRANSPARENT)	<b>1</b> ON/OFF	<b>BS</b> WHITE / BIANCO
		<b>C</b> 4000K	<b>.10</b> 10W	<b>.F</b> 30° (TRANSPARENT)	<b>8</b> DIMMER 1-10V	<b>BT</b> BLACK/ NERO
		* others on request / altri su richiesta	<b>.14</b> 14W	<b>.I</b> 48° (TRANSPARENT)		
			<b>.19</b> 19W	<b>BZ</b> 86° (TRANSPARENT)		
			<b>.25</b> 25W	<b>CT</b> 20° FROST		
				<b>CU</b> 30° FROST		
				<b>CV</b> 48° FROST		
				<b>CZ</b> 86° FROST		

CODE EXAMPLE : Projector with warm white light color at 3000K, 10W, 20° optic, ON/OFF control, white color  
2596.1B.10.D1BS

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 10W, ottica 20°, controllo ON/OFF, colore bianco  
2596.1B.10.D1BS

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy