- Circular recessed LED downlight
- Anodized aluminium body machined from solid in 6082 alloy and aluminum ring with polyester powder paint resistant to corrosion
- Beam angles 6° 12° 25° 48°
- Thermal shock resistant tempered, extraclear, anti-glare safety glass with grinded edges
- Springs for ceiling installation
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- Maximum permissible ambient temperature +50°C

- *Proiettore LED da incasso circolare*
- *Corpo in alluminio anodizzato tornito dal pieno lega 6082 ed anello in alluminio con verniciatura in polvere di poliestere resistente alla corrosione*
- *Angoli del fascio 6° 12° 25° 48°*
- *Vetro di sicurezza temperato con bordi molati, extrachiaro ed antiriflesso resistente agli shock termici*
- *Molle per installazione a soffitto*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Temperatura ambiente massima ammissibile +50°C*

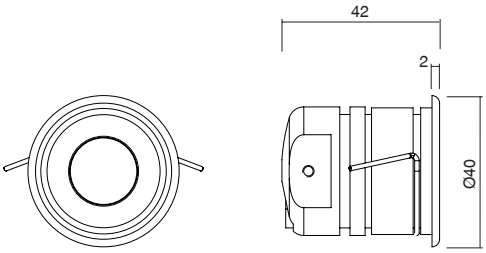

IP65

Lamp / *Lampada*	Input / *Alimentazione*	Power / *Potenza*	Color Tolerance/ *Tolleranza Cromatica*	CRI / *CRI*
PCB 1 LED CREE	220/240V 50/60Hz	1.5 / 3W	2-SDCM / 3-SDCM	80 MIN

Ø37mm

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.



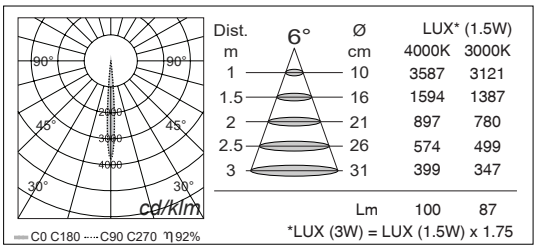

Dist. m	6° Ø cm	LUX* (1.5W) 4000K	3000K
1	10	3587	3121
1.5	16	1594	1387
2	21	897	780
2.5	26	574	499
3	31	399	347
Lm		100	87

*LUX (3W) = LUX (1.5W) x 1.75

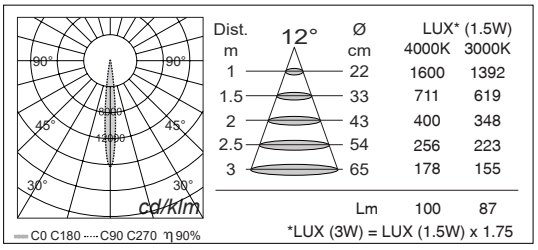

Dist. m	12° Ø cm	LUX* (1.5W) 4000K	3000K
1	22	1600	1392
1.5	33	711	619
2	43	400	348
2.5	54	256	223
3	65	178	155
Lm		100	87

*LUX (3W) = LUX (1.5W) x 1.75

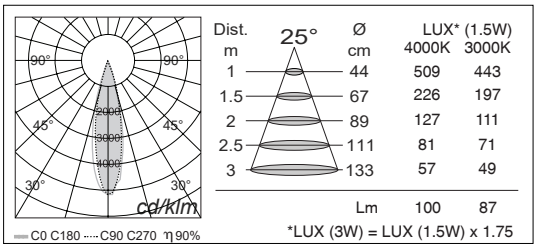

Dist. m	25° Ø cm	LUX* (1.5W) 4000K	3000K
1	44	509	443
1.5	67	226	197
2	89	127	111
2.5	111	81	71
3	133	57	49
Lm		100	87

*LUX (3W) = LUX (1.5W) x 1.75

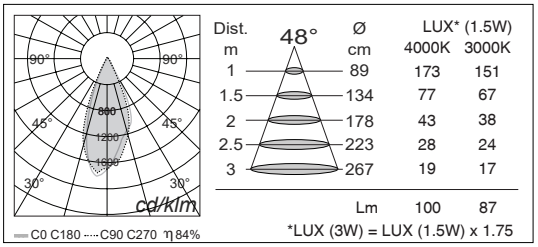

Dist. m	48° Ø cm	LUX* (1.5W) 4000K	3000K
1	89	173	151
1.5	134	77	67
2	178	43	38
2.5	223	28	24
3	267	19	17
Lm		100	87

*LUX (3W) = LUX (1.5W) x 1.75

MAIN CODE *CODICE BASE*	RELEASE *EDIZIONE*	LIGHT COLOR *COLORE LUCE*	WATT *WATT*	OPTIC *OTTICA*	CONTROL *CONTROLLO*	FRAME COLOR *COLORE*
2599	**.2**	**B** 3000K	**.01** 1.5W	**.A** 6°	**1** ON/OFF	**BS** WHITE / *BIANCO*
		C 4000K	**.03** 3W	**.C** 12°		**BT** BLACK/ *NERO*
		* others on request / *altri su richiesta*		**.E** 25°		
				.I 48°		

CODE EXAMPLE : Projector with warm white light color at 3000K, 3W, 6° optic, ON/OFF control, white color
2599.2B.03.A1BS

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 3W, ottica 6°, controllo ON/OFF, colore bianco
2599.2B.03.A1BS

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.