- LED projector with adjustable beam position
- Aluminium body machined from solid in 6082 alloy with surface protection treatment and subsequent polyester powder paint resistant to corrosion, atmospheric conditions and salt spray
- Thermal shock resistant tempered, extraclear, anti-glare safety glass with grinded edges
- Tilt-system in multiple steps of 7.5° and 15°with stainless steel grains, ensuring a stable fixation in time
- Plastic cable gland resistant to corrosion, atmospheric conditions and salt spray
- Stainless steel external screws. IP67 power supply in metal box included
- IP68 connector for the connection between projector and power supply included
- Spike accessory available on request (2 pcs needed to support the product)
- Safety cable accessory available on request
- Maximum permissible ambient temperature +50°C for the 50W and 75W versions, +35°C for the 100W version

- *Proiettore LED con fascio di luce orientabile*
- *Corpo in alluminio tornito dal pieno lega 6082 con trattamento superficiale di protezione e successiva verniciatura in polvere di poliestere resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Vetro di sicurezza temperato con bordi molati, extrachiaro ed antiriflesso resistente agli shock termici*
- *Sistema di regolazione della posizione a step multipli di 7.5° e 15° con grani in acciaio inox, per assicurare un fissaggio stabile nel tempo*
- *Pressacavo in plastica resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Viti esterne in acciaio inox. Alimentatore IP67 in box metallico incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Picchetto accessorio disponibile su richiesta (2 pz necessari per sostenere il prodotto)*
- *Cavo di sicurezza accessorio disponibile su richiesta*
- *Temperatura ambiente massima ammissibile +50°C per le versioni da 50W e 75W, +35°C per la versione da 100W*

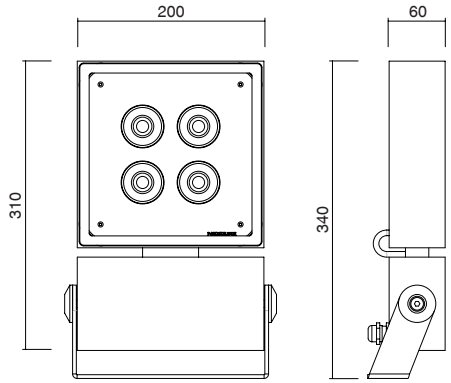

IP65 IK07 Kg 7.00 A G D

Lamp / *Lampada*	Input / *Alimentazione*	Power / *Potenza*	Color Tolerance/ *Tolleranza Cromatica*	CRI / *CRI*
4 LED COB CREE	220/240V 50/60Hz	50 / 75 / 100W	2-SDCM / 3-SDCM	80 MIN

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We rederve the right to change details and specifications without prior written notice.

NEXO LUCE







*SPIKE ACCESSORY ON REQUEST -
(2 pcs needed to support the product)
**ACCESSORIO PICCHETTO SU RICHIESTA - (2 pz necessari per sostenere il prodotto)*
code: 003.0203.C (Dark Grey/Antracite)

*SAFETY CABLE L.600MM D2,0MM ACCESSORY ON REQUEST
**ACCESSORIO CAVO DI SICUREZZA L.600MM D2,0MM SU RICHIESTA*
code: 003.0222.G (Stainless Steel/Acciao INOX)

Finishing

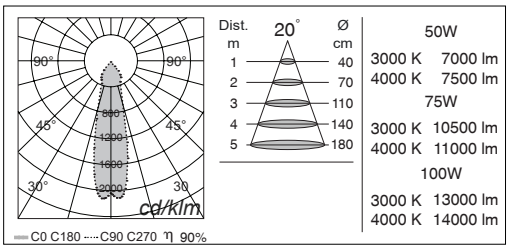

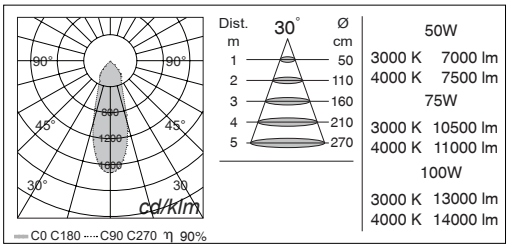

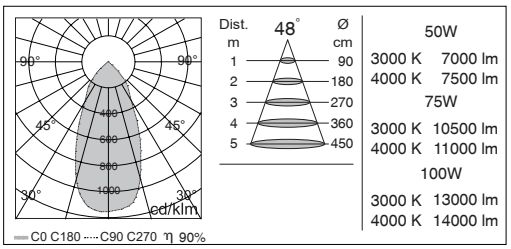

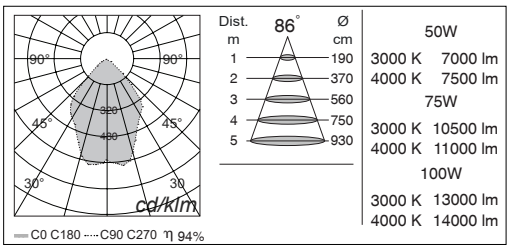

MAIN CODE *CODICE BASE*	RELEASE *EDIZIONE*	LIGHT COLOR *COLORE LUCE*	WATT *WATT*	OPTIC *OTTICA*	CONTROL *CONTROLLO*	FRAME COLOR *COLORE*
2620	**.1**	**B** 3000K	**.50** 50W	**.D** 20°	**1** ON/OFF	**.C** DARK GREY / *ANTRACITE*
		C 4000K	**.75** 75W	**.F** 30°		
		* others on request / *altri su richiesta*	**100** 100W	**.I** 48°		
				BZ 86°		

CODE EXAMPLE : Projector with warm white light color at 3000K, 50W, 20° optic, ON/OFF control, dark grey color
2620.1B.50.D1.C

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 50W, ottica 20°, controllo ON/OFF, colore antracite
2620.1B.50.D1.C

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We rederve the right to change details and specifications without prior written notice.