


- Circular recessed LED downlight with adjustable beam position
- Anodized aluminium body machined from solid in 6082 alloy and aluminum ring with polyester powder paint resistant to corrosion
- Beam angles 20° 30° 48° 86°
- Available with transparent or frost diffuser glass
- Springs for ceiling installation
- IP67 external power supply included
- IP68 connector for the connection between projector and power supply included
- Maximum permissible ambient temperature +50°C for the 5W, 10W and 14W versions, +35°C for the 19W and 25W versions




- *Proiettore LED da incasso circolare con fascio di luce orientabile*
- *Corpo in alluminio anodizzato tornito dal pieno lega 6082 ed anello in alluminio con verniciatura in polvere di poliestere resistente alla corrosione*
- *Angoli del fascio 20° 30° 48° 86°*
- *Disponibile con vetro diffusore trasparente oppure frost*
- *Molle per installazione a soffitto*
- *Alimentatore esterno IP67 incluso*
- *Connettore IP68 per la connessione fra proiettore ed alimentatore incluso*
- *Temperatura ambiente massima ammissibile +50°C per le versioni da 5W, 10W e 14W, +35°C per le versioni da 19W e 25W*

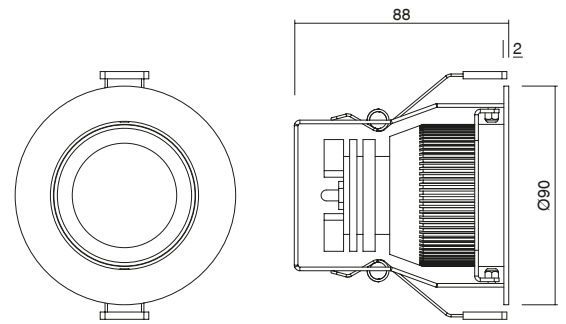







IP65

Lamp / Lampada 1 LED COB CREE	Input / Alimentazione 220/240V 50/60Hz	Power / Potenza 5/10/14/19/25W	Color Tolerance/ Tolleranza Cromatica 2-SDCM / 3-SDCM
-------------------------------------	--	--------------------------------------	---

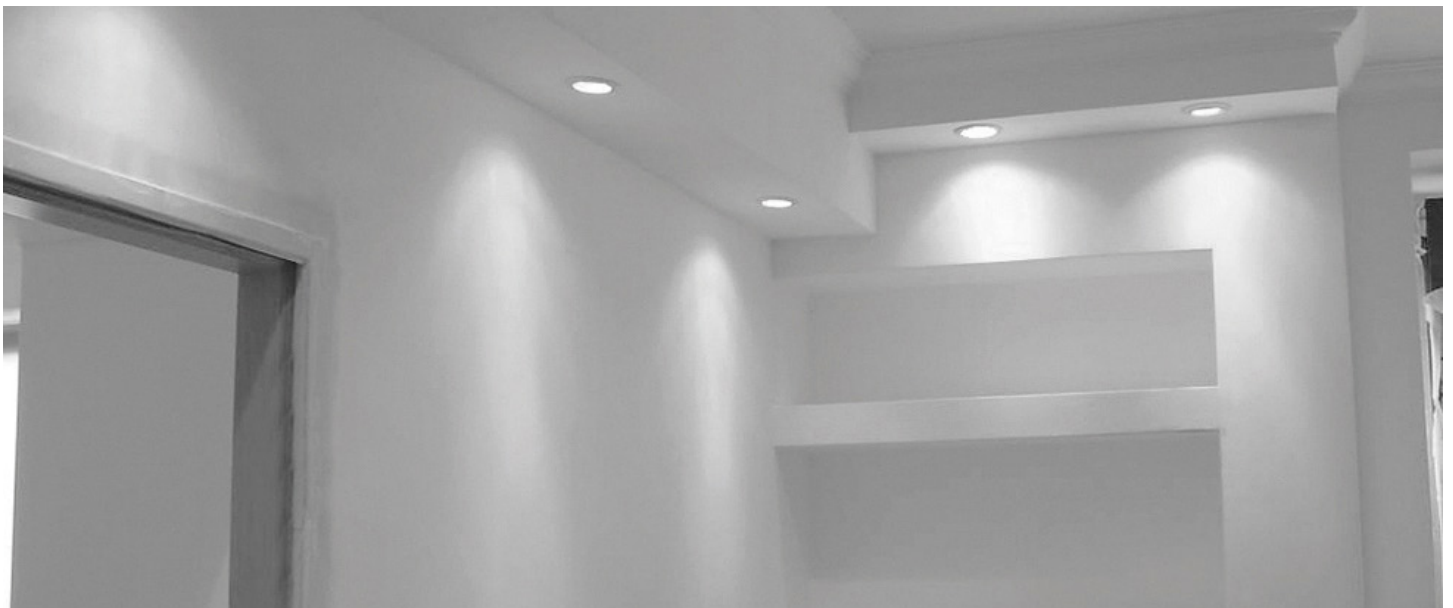

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy

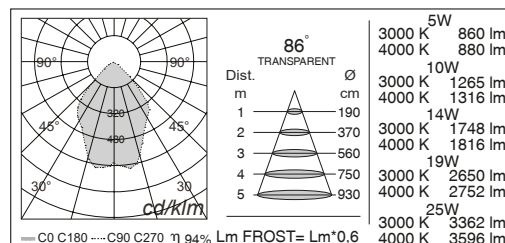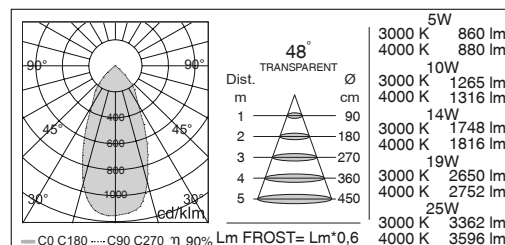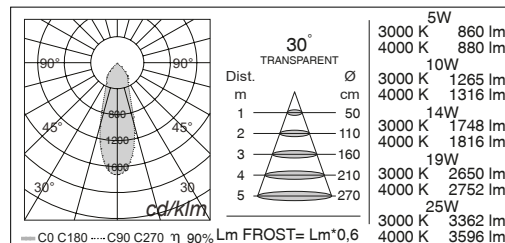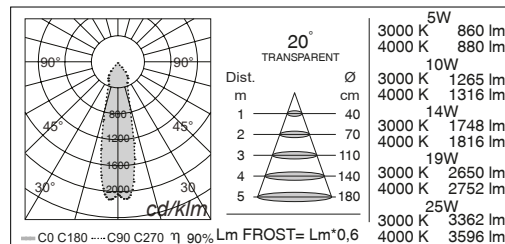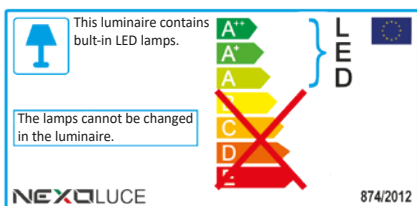

MAIN CODE CODICE BASE	RELEASE EDIZIONE	LIGHT COLOR COLORE LUCE	WATT WATT	OPTIC OTTICA	CONTROL CONTROLLO	FRAME COLOR COLORE
2633	.1	B 3000K	.05 5W	.D 20° (TRANSPARENT)	1 ON/OFF	BS WHITE / BIANCO
		C 4000K	.10 10W	.F 30° (TRANSPARENT)	8 DIMMER 1-10V	BT BLACK/ NERO
		* others on request / altri su richiesta	.14 14W	.I 48° (TRANSPARENT)		
			.19 19W	BZ 86° (TRANSPARENT)		
			.25 25W	CT 20° FROST		
				CU 30° FROST		
				CV 48° FROST		
				CZ 86° FROST		

CODE EXAMPLE : Projector with warm white light color at 3000K, 10W, 20° optic, ON/OFF control, white color  
2633.1B.10.D1BS

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 10W, ottica 20°, controllo ON/OFF, colore bianco  
2633.1B.10.D1BS

NEXO LUCE (Factory)  
Strada Mirabella, 10  
46040 Cavriana (MN), ITALY  
T +39 0376 771513 F +39 0376 772235  
sales@nexoluce.com www.nexoluce.com

Made in Italy