


- Ceiling mounted LED projector for indoor and outdoor applications
- Aluminium body with surface protection treatment and subsequent polyester powder paint resistant to corrosion, atmospheric conditions and salt spray
- Tempered, extraclear, anti-glare safety glass with grinded edges
- Beam angles 20° 30° 48° 86°
- Silicone gaskets
- Power supply integrated in the product body
- Maximum permissible ambient temperature + 35°C

- *Proiettore LED a plafone per interni ed esterni*
- *Corpo in alluminio con trattamento superficiale di protezione e successiva verniciatura in polvere di poliestere resistente agli agenti atmosferici, alla corrosione ed alle nebbie saline*
- *Vetro di sicurezza temperato con bordi molati, extrachiaro ed antiriflesso*
- *Angoli del fascio 20° 30° 48° 86°*
- *Guarnizioni in silicone*
- *Alimentatore integrato nel corpo del prodotto*
- *Temperatura ambiente massima ammissibile +35° C*





IP65      







Lamp / Lampada	Input / Alimentazione	Power / Potenza	Color Tolerance/ Tolleranza Cromatica
1 LED COB CREE	220/240V 50/60Hz	5/10/14/19/25W	2-SDCM / 3-SDCM



NEXO LUCE (Factory)
 Strada Mirabella, 10
 46040 Cavriana (MN), ITALY
 T +39 0376 771513 F +39 0376 772235
 sales@nexoluce.com www.nexoluce.com

 Made in Italy 

© Nexo Luce, a company incorporated in Italy. The logo and the name are the property of Nexo Luce SRL. The present datasheet and its content in whole or in part are the property of Nexo Luce SRL. All rights reserved. We reserve the right to change details and specifications without prior written notice.

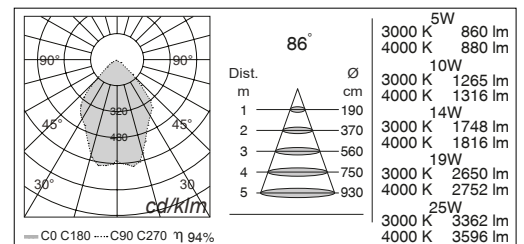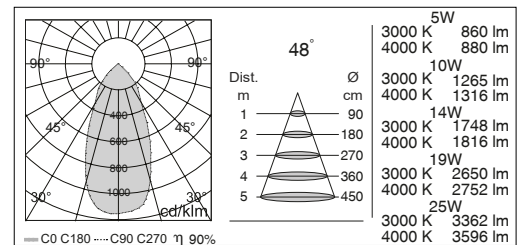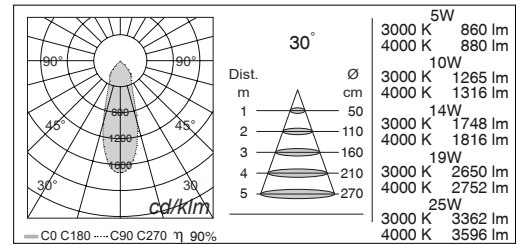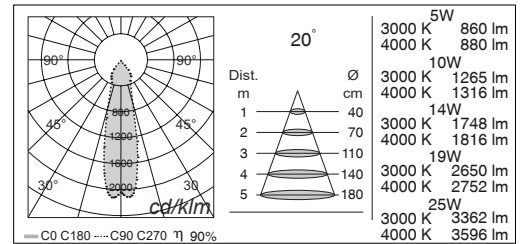

This luminaire contains built-in LED lamps.

The lamps cannot be changed in the luminaire.

LED

Energy efficiency class: A++ (green), A+ (light green), A (yellow-green), B (yellow), C (orange), D (red), E (dark red).

NEXOLUCE 874/2012

MAIN CODE CODICE BASE	RELEASE EDIZIONE	LIGHT COLOR COLORE LUCE	WATT WATT	OPTIC OTTICA	CONTROL CONTROLLO	FRAME COLOR COLORE
2649	.1	B 3000K	.05 5W	.D 20°	1 ON/OFF	BS WHITE / BIANCO
		C 4000K	.10 10W	.F 30°		BT BLACK/ NERO
		* others on request / altri su richiesta	.14 14W	.I 48°		
			.19 19W	BZ 86°		
			.25 25W			

CODE EXAMPLE : Projector with warm white light color at 3000K, 5W, 20 optic, ON/OFF control, white color 2649.1B.05.D1BS

ESEMPIO DI CODIFICA : Proiettore con luce calda a 3000K, 5W, ottica 20°, controllo ON/OFF, colore bianco 2649.1B.05.D1BS

NEXO LUCE (Factory)
Strada Mirabella, 10
46040 Cavriana (MN), ITALY
T +39 0376 771513 F +39 0376 772235
sales@nexoluce.com www.nexoluce.com

Made in Italy